

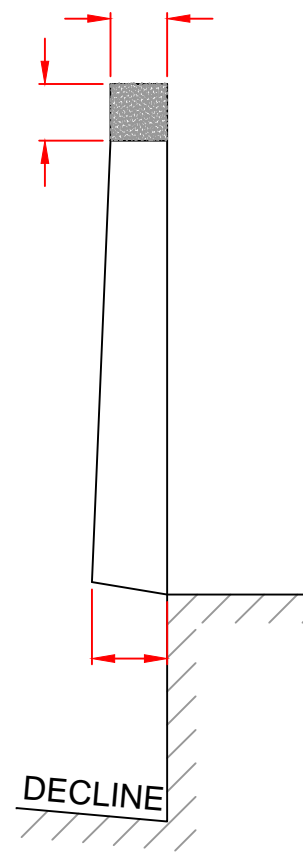
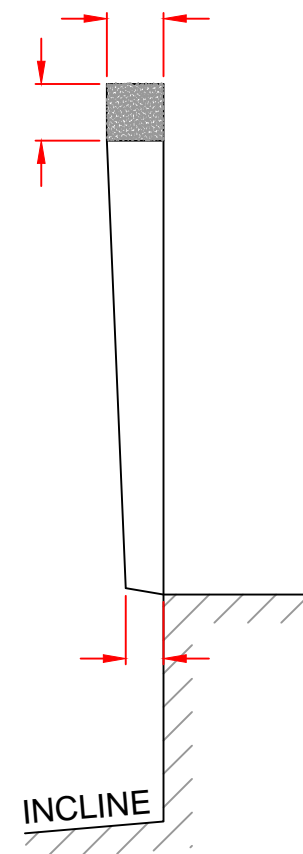



SECTION OF SQUARE PADS

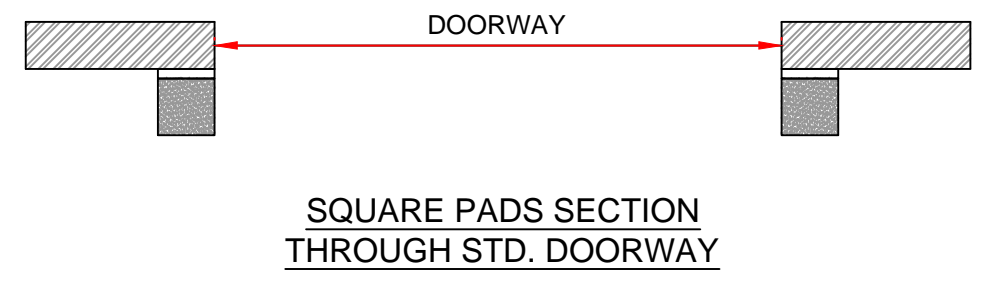

SECTIONS OF SLOPING APPROACHES WITH TAPERED PADS

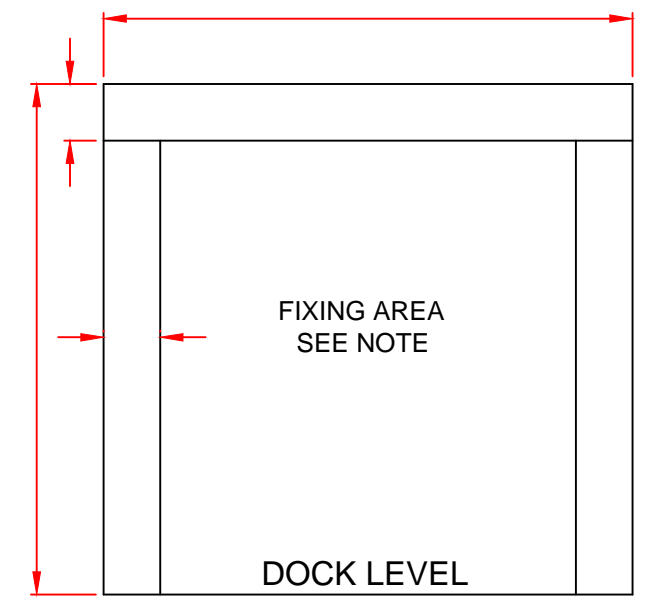

SQUARE PADS SECTION THROUGH STD. DOORWAY

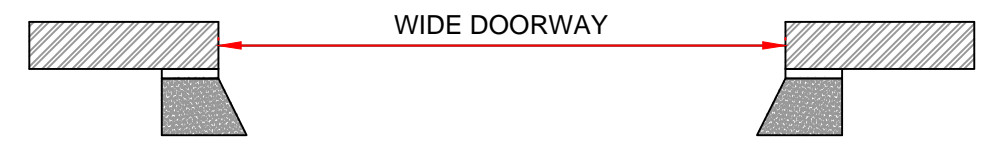

BEVELLED PADS SECTION THROUGH WIDE DOORWAY

FIXING AREA
 The fixing area which has to be supplied by the client must be flush and in the same plane. It must be able to support the dock shelter and pressure of approx. 600kg/m²
NOTE: For pads fitted to a steel frame construction and fixed through the back of the seal add 20mm clearance. Pads using cleats for installation add 75mm to the fixing face on outer edges. off-set galv. cleats supplied to set side pads 25mm away from door jamb

F & G dimensions dependant on slope.
 D = 300 / 450 / 600 high head pads.



CUSTOMER	-	DRAWN	-	DATE	00.00.00
PROJECT	-	MANUFACTURED	-	DATE	00.00.00
TITLE	FOAM PAD DOCK SEAL	WORKS ORDER NO.	000	ENQUIRY NUMBER	-
		SCALE	-	WHEN PLOTTED	-
		DRG NO.	-	REV	-

