



VIEW FROM INSIDE

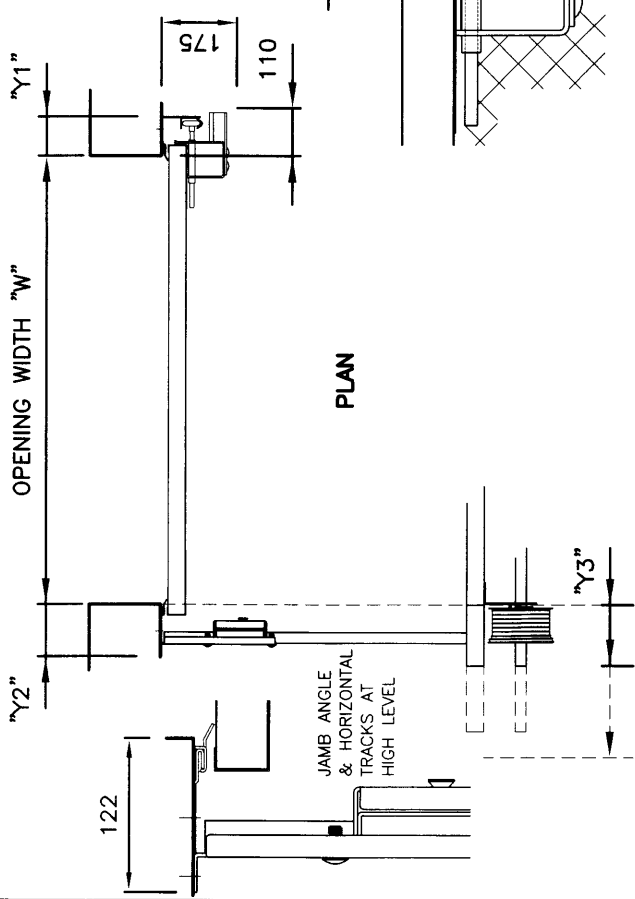

PLAN

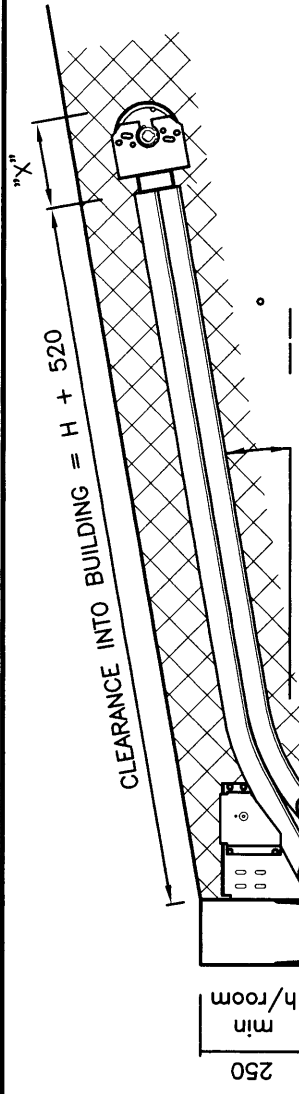

SHADED AREA TO BE KEPT FREE FROM OBSTRUCTIONS.


"Y"	SIDEROOM DIMENSION	
"Y1"	LOW LEVEL jamb angle	90
"Y2"	HIGH LEVEL at fixing face without tension set	122
"Y3"	HIGH LEVEL at rear counterbalance assembly	150
"Y3"	HIGH LEVEL at rear c/balance assembly with motor/chain hoist	350

FRT _____
 TRACK SETS AVAILABLE IN:- 5", 10", 15", 20" & 28". PLEASE SPECIFY WHICH IS REQUIRED WHEN ORDERING.

HEIGHT	SPRING Ø	"X"
0 - 3680	95	190
3681 - 5000	95	205
3681 - 5000	152	230

175 (40mm panel)


THE INTERNAL THRESHOLD SHOULD BE SMOOTH & LEVEL. IT IS ADVISED THAT THE EXTERNAL THRESHOLD SLOPES AWAY FROM THE OPENING TO HELP PREVENT WATER INGRESS.

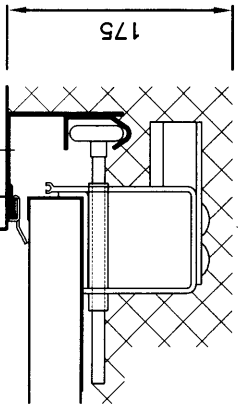

All dimensions in mm, unless specified. Tolerance + or - 5mm. All dimensions are based on Kingspan standard 40mm thick panels & standard 51mm (2") track.

CLIENT O/No.	
QUANTITY	
OPERATION	ELEC / CHAIN / PUSH UP
HAND OF OPERATION	
VIEWED FROM INSIDE (V.F.I)	LH / RH
POWER SUPPLY (if elec)	1PH / 3PH
PANEL FINISH	POLYESTER / PLASTISOL
EXTERNAL COLOUR & REFERENCE:-	
INTERNAL (RAL 9010 WHITE STD)	
WICKET DOOR REQ'D	YES / NO
(positioned centrally)	
WICKET DOOR HINGE (V.F.I)	LH / RH
VISION PANELS	No. ROWS OF WINDOWS
IN _____ + _____	PANEL(S) FROM BOTTOM
OTHER:-	

INSTALLATION CLEARANCES
 LOW HEADROOM TRACK (FTR) INBOARD CABLES
 MAX WIDTH = 5000mm.
 MAX HEIGHT = 5000mm.
 MAX WEIGHT = 300Kg.



indupart

DATE :	DWG NO.	REV
		A
DRAWN BY :	J.E	SHEET
		INSTALL 5/5