


# Sectional Door Panels available from Indupart

INDUPART, the UK market leader in the supply of Sectional Overhead Door panels to the trade, are able to provide you with the widest selection currently available.

All panels usually in stock at our depots in Stockport, Hemel Hempstead, Bristol and Glasgow

We offer competitive prices and are unbeatable on service.

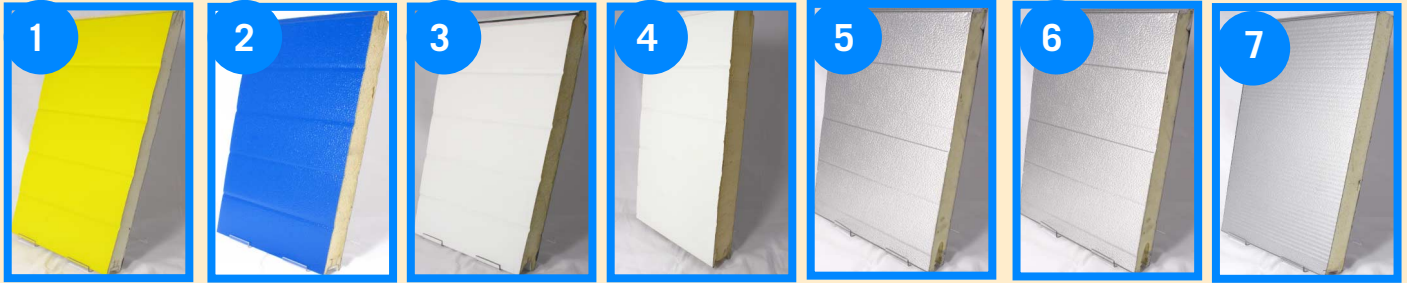

TYPE W

TYPE W


TYPE W-FS

TYPE W8

TYPE C

TYPE C

TYPE CM

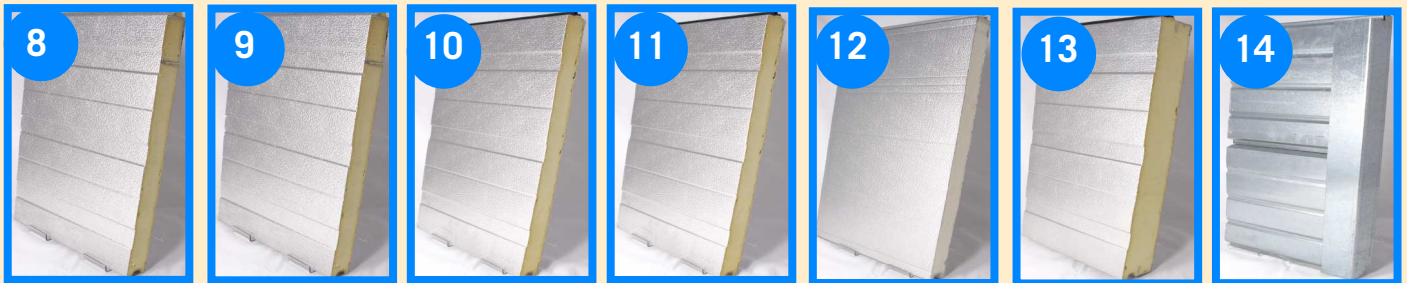

TYPE N

TYPE N

TYPE N

TYPE N

TYPE N9000

TYPE N8

TYPE U



TYPE K

TYPE T

TYPE H

TYPE H

TYPE W

TYPE NF

TYPE NF

**TYPE W:** ① Kingspan/Ward. 610 deep x 40 thick. Stucco embossed steel insulated door panel. Both faces ribbed profile, finished in RAL 9010 white polyester inside face. Outside face finished in plastisol, available colours Sunflower Yellow (as shown above), Goosewing Grey, Leaf Green, Merlin Grey, Gull Grey, Khaki Green, Azure Blue, Olive Green, Flame Red, Sapphire Blue, Cornflower Blue or Vandyke Brown. Lengths 4050, 5050, 6100.

**TYPE W:** ② Kingspan/Ward. 610 deep x 40 thick. Stucco embossed steel insulated door panel. Both faces ribbed profile, finished in RAL 9010 white polyester inside face. Outside face finished in stucco polyester, available colours White, Ivory, Bone White, Sepia Brown, Yellow, Sunset Red, Grey Brown, Silver, Gentian Blue (as shown above), Anthracite, Fir Green, Grey Aluminium. Lengths 4050, 5050, 6100.

**TYPE W-FS:** ③ Kingspan/Ward. "Fingersafe" 610 deep x 40 thick. Stucco embossed steel insulated door panel. Both faces ribbed profile, finished in RAL 9010 white polyester. Lengths 4050, 5050, 6100.

**TYPE W8:** ④ Kingspan/Ward. 610 deep x 80 thick. Stucco embossed steel insulated door panel. Both faces ribbed profile, finished in RAL 9010 white polyester. Lengths 4050, 5050, 6100.

**TYPE C:** ⑤ 500 deep x 42 thick (tapered to 40 at the bottom). Aluminium Stucco both faces. Lengths 3050, 4050, 5050, 6100, 8200.

**TYPE C:** ⑥ 500 deep x 42 thick (tapered to 40 at the bottom). Steel Stucco both faces. Lengths 3050, 4050, 5050, 6100, 8200.

**TYPE CM:** ⑦ Microline. 610 Stucco embossed steel door panel. Both faces finished in RAL 9006 Silver. Lengths 4100, 8200.

**TYPE N:** ⑧ 500 deep x 44 thick door panel in Stucco aluminium finish. Tongue and groove rebate. Lengths 3050, 4050, 5050, 6100, 8100.

**TYPE N:** ⑨ 500 deep x 44 thick door panel in Stucco steel finish. Tongue and groove rebate. Length 6100.

**TYPE N:** ⑩ 600 deep x 44 thick door panel in Stucco aluminium finish. Tongue and groove rebate. Lengths 4050, 6100.

**TYPE N:** ⑪ 600 deep x 44 thick door panel in Stucco steel finish. Tongue and groove rebate. Lengths 4050, 6100.

**TYPE N9000:** ⑫ 675 deep x 44 thick door panel in Stucco aluminium finish. Lengths 4050, 6000, 8200.

**TYPE N8:** ⑬ 600 deep x 80 thick door panel in Stucco aluminium finish. Tongue and groove rebate. Length 6100.

**TYPE U:** ⑭ 305 high Uninsulated galvanised steel, stepped rebated door panel. Lengths 4000, 5000, 6000, 8000.

**TYPE K:** ⑮ 600 deep x 40 thick Steel door panel. White plastisol leathergrain outside face, inside Stucco embossed. Lengths 3050, 4050, 5050, 6100 and 8200.

**TYPE T:** ⑯ 610 deep x 39 thick "Fingersafe" Steel door panel. Stucco outside face in RAL 9010 White, inside face Stucco RAL 9002 Light Grey. Lengths 3050, 4050, 5050, 6100 and 12200.

**TYPE H:** ⑰ 500 deep x 42 thick insulated "Fingersafe" steel door panel. Ribbed profile both sides. Stucco embossed light grey finish to both sides. Lengths 4000, 8000.

**TYPE H:** ⑱ 750 deep x 42 thick insulated "Fingersafe" steel door panel. Ribbed profile both sides. Stucco embossed light grey finish to both sides. Lengths 4000, 8000.

**TYPE W:** ⑲ Kingspan/Ward. 610 deep x 40 thick. Steel insulated door panel. Outside face smooth finish, inside face stucco embossed finish. Both sides finished in RAL 9010 white polyester. Lengths 3050, 4050, 5050, 6100 and 8100.

**TYPE NF:** ⑳ "Fingersafe" 625 deep x 45 thick. Stucco embossed steel insulated door panel. Finished in RAL 9002 light grey polyester. Lengths 4000, 6000 and 8000.

**TYPE NF:** ㉑ "Fingersafe" 500 deep x 45 thick. Stucco embossed steel insulated door panel. Finished in RAL 9002 light grey polyester. Lengths 4000, 6000 and 8000.



Certificate number 4265

For further information, please telephone  
or fax our National Sales Centre Hotline

**0161 432 6655**

Industrial Doors & Hardware **indupart**

Fax 0161 432 6400 or visit us at [indupart.co.uk](http://indupart.co.uk)

**National Sales & Northern  
Distribution Centre**

Indupart Limited, The Door Centre  
Discovery Park, Crossley Road  
Stockport, Cheshire SK4 5BW  
Telephone: 0161 432 6655  
Fax: 0161 432 6400  
E mail: [sales@indupart.co.uk](mailto:sales@indupart.co.uk)

Registered in England 2079486  
VAT Registration 467 2425 36

**South Eastern  
Distribution Centre**

Indupart Limited, Unit 8  
Hall Road  
Maylands Wood Estate  
Hemel Hempstead  
Herts  
HP2 7BH

**South Western  
Distribution Centre**

Indupart Limited  
Unit 1  
Duckmoor Road Ind. Estate  
Duckmoor Road  
Ashton  
Bristol BS3 2BJ

**Scotland  
Distribution Centre**

Indupart Scotland  
Block 18  
Unit 6  
Queenslie Ind. Estate  
Glasgow  
G33 4DD