


VIEW FROM INSIDE

ALL ST/WRK MUST BE PLUMB VERTICAL & FLUSH.

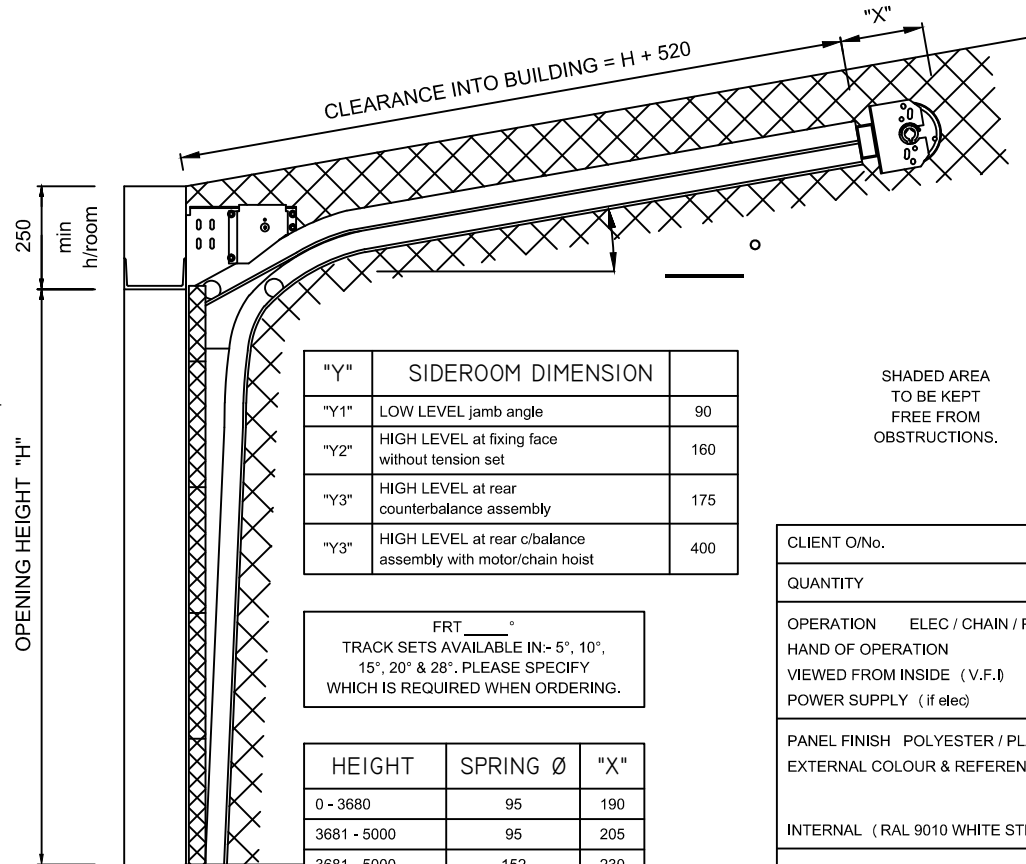


SHADED AREA TO BE KEPT FREE FROM OBSTRUCTIONS.

"Y"	SIDEROOM DIMENSION	
"Y1"	LOW LEVEL jamb angle	90
"Y2"	HIGH LEVEL at fixing face without tension set	160
"Y3"	HIGH LEVEL at rear counterbalance assembly	175
"Y3"	HIGH LEVEL at rear c/balance assembly with motor/chain hoist	400

FRT _____ °
 TRACK SETS AVAILABLE IN:- 5°, 10°, 15°, 20° & 28°. PLEASE SPECIFY WHICH IS REQUIRED WHEN ORDERING.

HEIGHT	SPRING Ø	"X"
0 - 3680	95	190
3681 - 5000	95	205
3681 - 5000	152	230

CLIENT O/No.	
QUANTITY	
OPERATION	ELEC / CHAIN / PUSH UP
HAND OF OPERATION	LH / RH
VIEWED FROM INSIDE (V.F.I)	1PH / 3PH
POWER SUPPLY (if elec)	
PANEL FINISH POLYESTER / PLASTISOL	
EXTERNAL COLOUR & REFERENCE:-	
INTERNAL (RAL 9010 WHITE STD)	
WICKET DOOR REQ'D	YES / NO
(positioned centrally)	
WICKET DOOR HINGE (V.F.I)	LH / RH
VISION PANELS	_____ No. ROWS
	OF _____ WINDOWS
IN _____ + _____ PANEL (S)	FROM BOTTOM
OTHER:-	

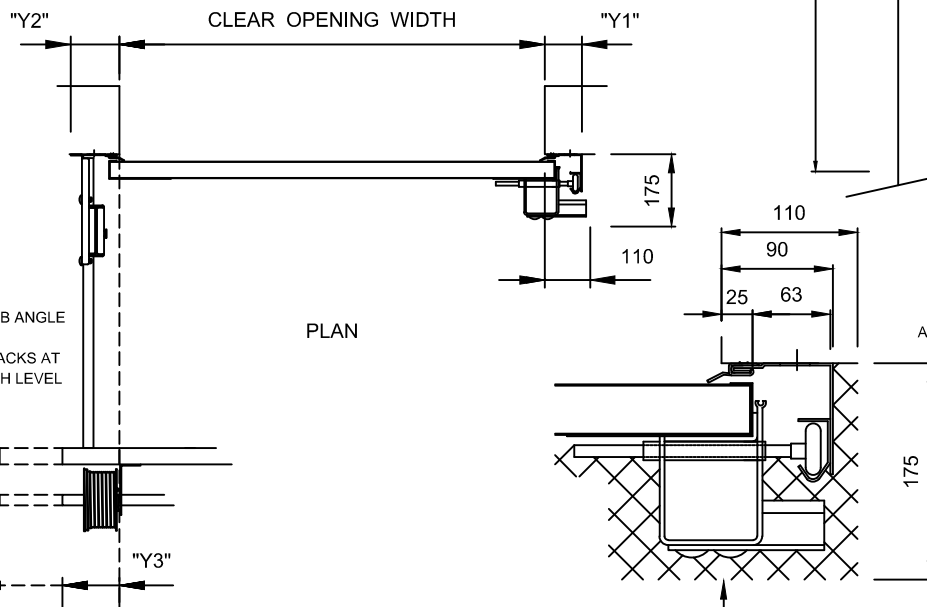


PLAN

THE INTERNAL THRESHOLD SHOULD BE SMOOTH & LEVEL. IT IS ADVISED THAT THE EXTERNAL THRESHOLD SLOPES AWAY FROM THE OPENING TO HELP PREVENT WATER INGRESS.

CLEARANCE AT LOW LEVEL FOR JAMB ANGLE & CABLE BREAK DEVICE.

All dimensions in mm, unless specified. Tolerance + or - 5mm.
 All dimensions are based on Kingspan standard 40mm thick panels & standard 51mm (2") track.



indupart

INSTALLATION CLEARANCES
 LOW HEADROOM TRACK (FTR) INBOARD CABLES
 MAX WIDTH = 5000mm.
 MAX HEIGHT = 5000mm.
 MAX WEIGHT = 300Kg.

DATE :	DWG NO.	REV
DRAWN BY :	J.E	C
SHEET	INSTALL 5/5	
©indupart 2014		