

CLEAR OPNG HEIGHT	DIM "B"
0 - 3680	65
3680 - 5500	65
5500 - 6000	65



SHADED AREAS:-  
TO BE KEPT FREE FROM  
OBSTRUCTIONS.  
EXTRA ST/WRK REQ'D  
FOR MOTOR / CHAIN HOIST.

SHADED AREAS:-  
EXTRA ST/WRK REQUIRED  
801000 CHAIN HOIST  
REFER TO DWG PN801000.


AREAS TO BE KEPT FREE FROM OBSTRUCTIONS		
DIM	MOTOR SIDE	NON MOTOR SIDE
"A"	420	200

EXTRA ST/WRK DIMS FOR MOTOR / CHAIN HOIST	
DIM	
"A"	250

ALL ST/WRK MUST BE PLUMB VERTICAL & FLUSH.

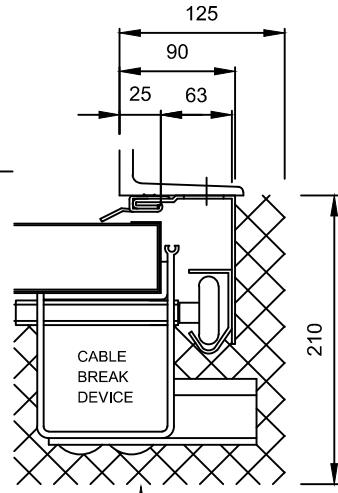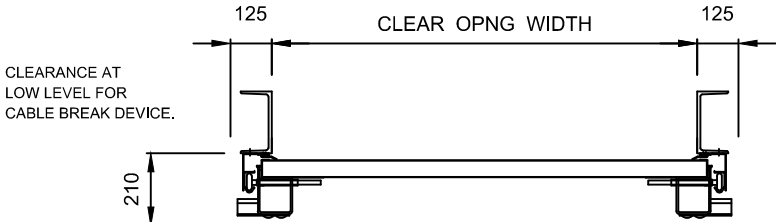

CLEARANCE AT LOW LEVEL FOR CABLE BREAK DEVICE.

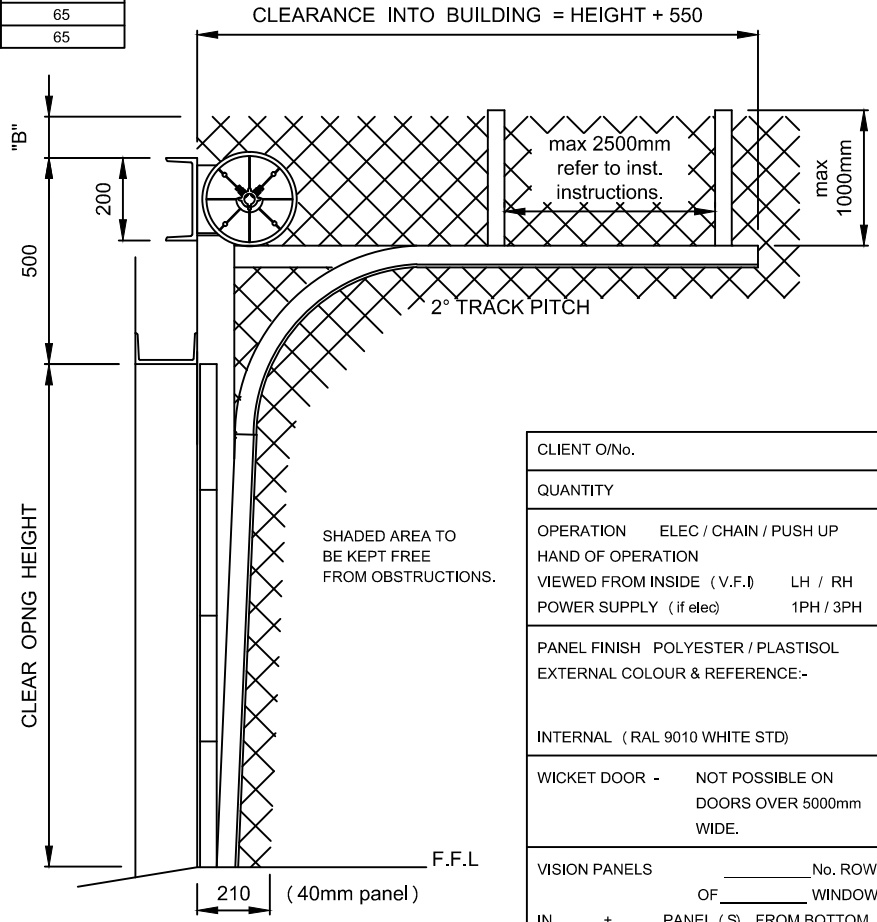

SHADED AREA TO BE KEPT FREE FROM OBSTRUCTIONS.

THE INTERNAL THRESHOLD SHOULD BE SMOOTH & LEVEL. IT IS ADVISED THAT THE EXTERNAL THRESHOLD SLOPES AWAY FROM THE OPENING TO HELP PREVENT WATER INGRESS.

CLIENT O/No.	
QUANTITY	
OPERATION	ELEC / CHAIN / PUSH UP
HAND OF OPERATION	LH / RH
VIEWED FROM INSIDE (V.F. I)	1PH / 3PH
POWER SUPPLY (if elec)	
PANEL FINISH POLYESTER / PLASTISOL	
EXTERNAL COLOUR & REFERENCE:-	
INTERNAL (RAL 9010 WHITE STD)	
WICKET DOOR -	NOT POSSIBLE ON DOORS OVER 5000mm WIDE.
VISION PANELS	_____ No. ROWS OF _____ WINDOWS
IN _____ + _____	PANEL (S) FROM BOTTOM
OTHER:-	

# 3" TRACK

All dimensions in mm, unless specified. Tolerance + or - 5mm.  
All dimensions are based on Kingspan standard 40mm thick panels & standard 75mm (3") track.

	CLIENT / SITE :		
	DESCRIPTION : INSTALLATION CLEARANCES STANDARD LIFT - 40mm THICK PANEL c/w 3" TRACK		
	DATE :	DWG NO. INSTALL 6	REV C
	DRAWN BY :	SHEET	©indupart 2014