


Cube Compact Door

(Stacking Sectional Door)

   /indupart  /company/indupart-ltd

0161 432 6655 | sales@indupart.co.uk | www.indupart.co.uk

Northern Sales, Distribution Centre & Production Warehouse
The Door Centre, Discovery Park, Crossley Road, Stockport, SK4 5BW

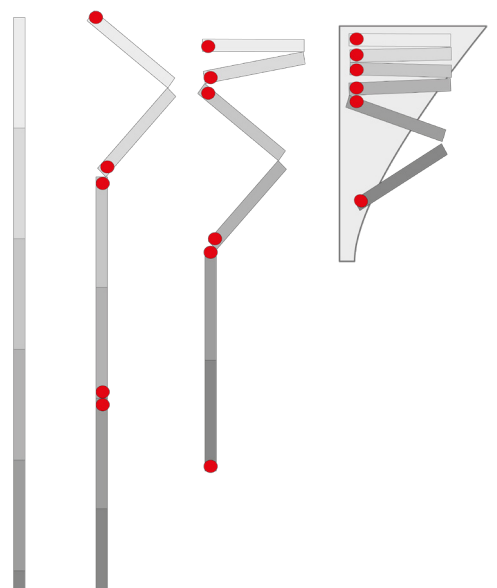

**Raising Standards
Safety Assured**

Application

The Indupart Cube door is ideal for situations where there is little or no space for the traditional track system, the sections of the Cube fold into a limited space behind the door opening.

Because there are no horizontal tracks, the Cube can be quickly installed. Ideal for a location where a crane track would be extended to immediately behind the door as well as garages with inspection ramps behind the doors.

Details

Maximum Dimensions: 4500mm x 4750mm WxH
Sectional Filling: Windows, glass, open / blank fillings in various versions
Heat Insulation: 3.84 W/M²*K (fully acrylic double)

Design

The Cube is supplied as standard with anodised aluminium A40 sections. These sections can be combined with S40 steel sandwich sections. The Cube always has an even number of sections, meaning each section is made up of 2 sections, each at the same height up to a maximum of 650mm. For each pair of sections, one of them will have an external hinge.

The sections concertina compactly behind the structural opening, meaning a limited depth for the installation is not a problem. Available with A40 aluminium and if required combined with S40 steel sections.

Customisation

The sections can be powder coated in any RAL colour. You can also choose fillings for the sections, from solid to transparent glazing.

Springs

The spring system for the Cube is pre-mounted on a box section, this ensures quick and easy installation.

Security

The Cube industrial door meets the CE requirements laid down in the European guideline for industrial doors (NEN-EN 13241-1). In combination with a drive, you can choose from various safety devices and operating options.

Requirements

Top Clearance: 1100mm (top) 850mm (behind)
Free Installation Depth: 750mm (top) 1000 (behind)
Side Clearance: 95mm (side) 360mm (operating side)

Classifications

Wind Load: Class 4
Water Load: Class 3
Air Permeability: Class 3

Equipment

Drive: Electrical
Operating Equipment: Standard control box, various options

